

**Data Sheet**  
**Fast Diode Current Modulator MCM 10-25-z**

**Features**

- Drives arbitrary current waveforms into laser diodes
- CW, pulsed, modulated or arbitrary curves
- External trigger input, internal pulse generator
- Short rise and fall time
- Two analog hardware inputs plus software BIAS current
- Serial interface for configuration, controlling and monitoring

**Specification**

Diode current CW	0 ... 10A
Diode current pulsed	0 ... 20A (short pulses)
Diode voltage	1 ... 22,5V
Output power	230W
Power dissipation	30W max allowed
Supply voltage	4,5 ... 24,5V
Supply current	max 11A
Rise time / Fall time	6µs / 6µs (@100% current)
Frequency (set point 1)	max 80kHz
Frequency (set point 2)	max 80kHz

**Signal Inputs / Outputs**


Diode current set point 1	0 ... 500mV (50 Ohm input)
Diode current set point 1 pulse	0 ... 1000mV (50 Ohm input)
Diode current set point 2	0 ... 5V (high impedance)
Enable & Reset / Trigger	Open Collector / TTL
Diode current monitor	0 ... 2,5V
Temperature	1863,9mV ... 919mV for 0 ... 80°C
Ready	Open Collector

**General Specifications**

Ambient temperature	0 ... +45°C	Temperature drift	±250ppm / °C
Cooling	Required	Frequency bandwidth DC	93kHz (set point 1)
Dimensions	87 x 72 x 41mm	Frequency bandwidth DC	68kHz (set point 2)
Weight	220g	Accuracy	± 0,2%
		Internal DA-converter	12-bit

**Description**

The diode current modulator MCM 10-25-z is a linear modulator with excellent properties for driving arbitrary current waveforms or pulses into laser diodes. Current waveforms can be CW, pulsed, modulated or mixed with frequencies up to 80 kHz and currents up to 10A for CW and 20A for short pulsed waveforms. An internal pulse generator and an external trigger input generate fast and clean pulses. The modulator is small and compact and it is designed for mounting with low inductance at laser diodes or for integration in laser diode modules. It has two hardware analogue inputs for the current set point and one software BIAS current set point. All set points are added and build the effective current set point. Configuration, controlling and monitoring with PC, notebook or tablet.

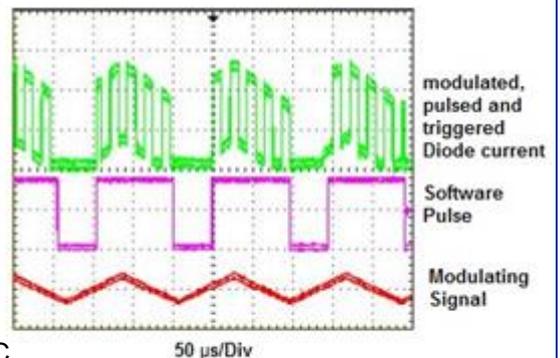

Type	Interface	Order Code
MCM 10-25-U	USB	10100555
MCM 10-25-R	RS 232	10100570



**Warning!**  
**Risk of exposure of hazardous laser radiation**  
**in combination with laser light emitting devices!**

Technical subjects to change without notice.

Document: 10100555	Revision: 03	Date: 21.02.2019
www.powerconverter.eu	info@powerconverter.eu	+49 (0) 8856 803060